

## MRI100.12

### 2 in 1 IGBT Modules




#### Features:

- High speed switching
- Voltage drive
- Low inductance module structure
- Simple mounting

#### Typical applications:

- Inverter for Motor Drive
- Inverter for Welding machine
- Uninterruptible Power Supply
- Industrial machines

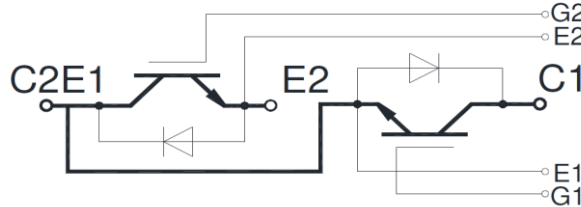

Symbol	Characteristics	Test Conditions	Value			Unit
			Min	Typ	Max	
$V_{CES}$	Collector-Emitter voltage	$T_j = 25^\circ\text{C}$			1250	V
$V_{GES}$	Gate-Emitter voltage	$T_j = 25^\circ\text{C}$			$\pm 30$	V
$I_C$	Collector current	Continuous @ $T_c = 100^\circ\text{C}$			100	A
$I_{CP}$		$T_p = 1\text{ ms}$			200	A
$P_C$	Collector power dissipation	$T_j = 150^\circ\text{C}$ , 1 device			500	W
$T_j$	Junction temperature	/	-40		175	$^\circ\text{C}$
$T_{stg}$	Storage temperature	/	-40		125	$^\circ\text{C}$
$V_{ISO}$	Isolation between terminal and copper base	$T_j = 25^\circ\text{C}$ , AC: 1 minute	2500			V
Screw torque	Mounting (M6)	/	4.5		6.0	N·m
	Terminals (M5)	/	2.5		4.5	N·m
$I_{CES}$	Zero gate voltage collector current	$T_j = 25^\circ\text{C}$ , $V_{CE} = 1200\text{V}$ , $V_{GE} = 0\text{V}$			1	mA
$I_{GES}$	Gate-Emitter leakage current	$T_j = 25^\circ\text{C}$ , $V_{CE} = 0\text{V}$ , $V_{GE} = \pm 20\text{V}$			$\pm 2$	$\mu\text{A}$
$V_{GE(th)}$	Gate-Emitter threshold voltage	$T_j = 25^\circ\text{C}$ , $V_{CE} = 20\text{V}$ , $I_C = 100\text{mA}$	5		8.5	V
$V_{CE(sat)}$	Collector-Emitter saturation voltage	$T_j = 25^\circ\text{C}$ , $V_{GE} = 15\text{V}$ , $I_C = 100\text{A}$		1.75	2.40	V
		$T_j = 125^\circ\text{C}$ , $V_{GE} = 15\text{V}$ , $I_C = 100\text{A}$		1.95		V
		$T_j = 150^\circ\text{C}$ , $V_{GE} = 15\text{V}$ , $I_C = 100\text{A}$		2.05		V
$C_{ies}$	Input capacitance	$T_j = 25^\circ\text{C}$ , $V_{CE} = 10\text{V}$ , $V_{GE} = 0\text{V}$ , $f = 1\text{MHz}$		9.1		nF
$t_{on}$	Turn-on time	$T_j = 150^\circ\text{C}$ , $V_{CC} = 600\text{V}$ , $I_C = 100\text{A}$ , $V_{GE} = \pm 15\text{V}$ , $R_G = 10\Omega$ , inductive load		160		ns
$t_r$				40		ns
$t_{off}$				600		ns
$t_f$				200		ns
$t_{SC}$	Short Circuit withstand time	$T_j = 150^\circ\text{C}$ , $V_{CC} = 720\text{V}$ , $V_{GE} = \pm 15\text{V}$ , $R_G = 10\Omega$	10			$\mu\text{s}$
$V_F$	Forward on voltage	$T_j = 25^\circ\text{C}$ , $I_F = 100\text{A}$		1.80	2.60	V
		$T_j = 125^\circ\text{C}$ , $I_F = 100\text{A}$		1.88		V
		$T_j = 125^\circ\text{C}$ , $I_F = 100\text{A}$		1.95		V
$t_{rr}$	Reverse recovery time	$T_j = 125^\circ\text{C}$ , $I_F = 100\text{A}$		135		ns
		$T_j = 125^\circ\text{C}$ , $I_F = 100\text{A}$		150		ns
$R_{th(j-c)}$	Thermal resistance (per chip)	IGBT			0.30	$^\circ\text{C/W}$
		FWD			0.50	$^\circ\text{C/W}$
$R_{th(c-f)}$	Contact thermal resistance (per module)	With thermal compound		0.05		$^\circ\text{C/W}$
$W_t$	Weight				155	g
Outline		251H3				

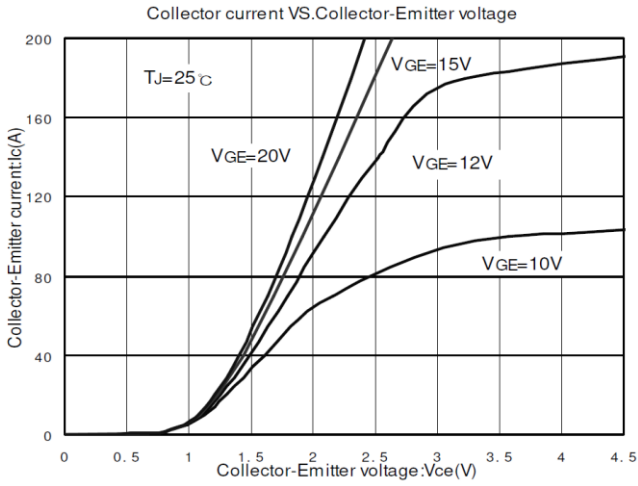


Fig.1

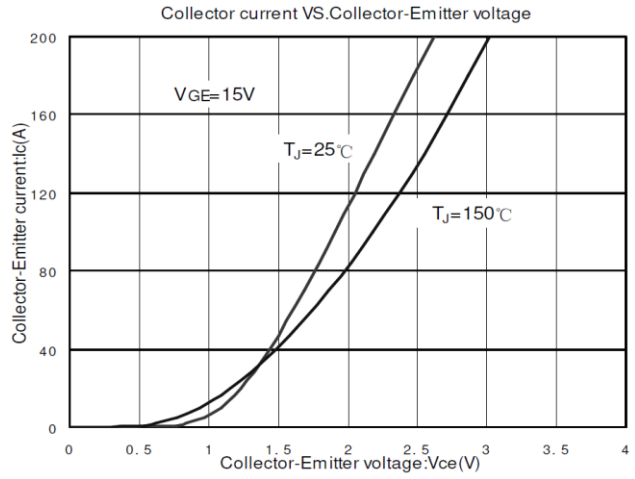


Fig.2

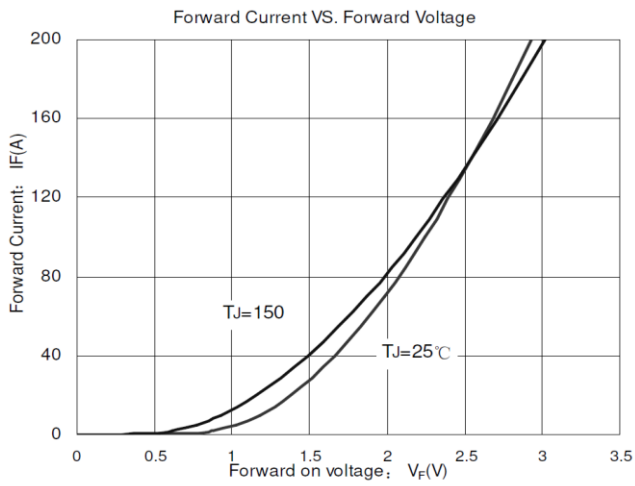


Fig.3

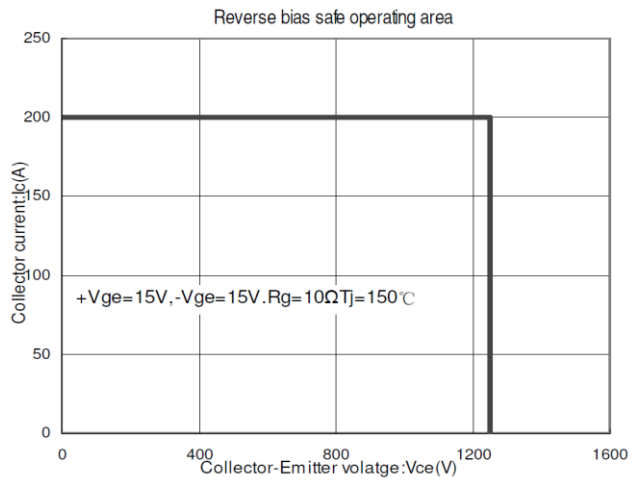


Fig.4

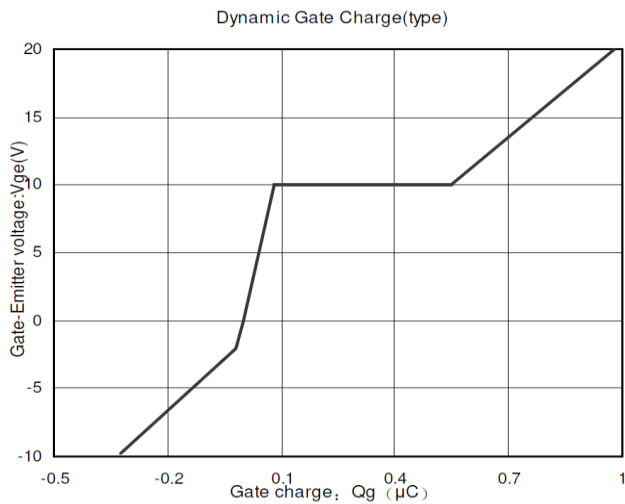


Fig.5

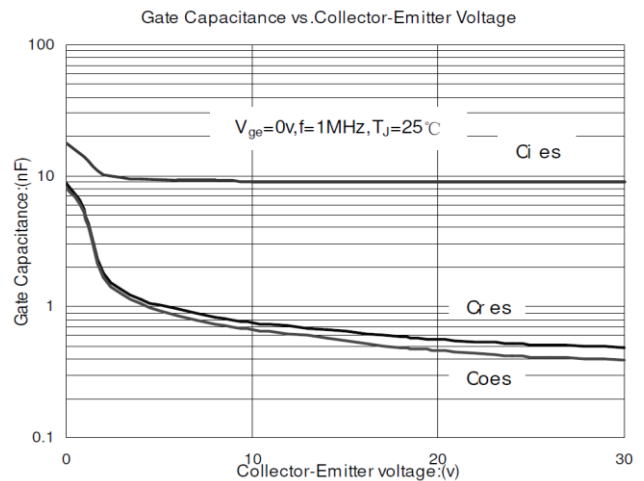


Fig.6

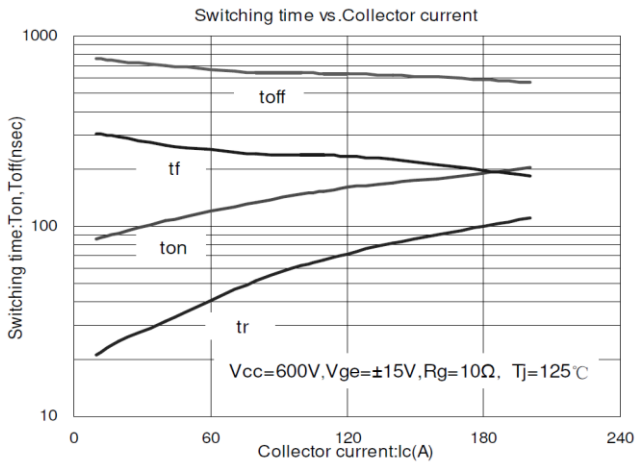


Fig.7

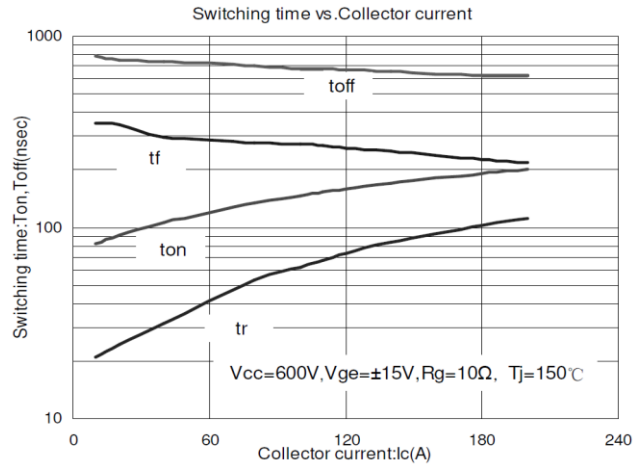


Fig.8

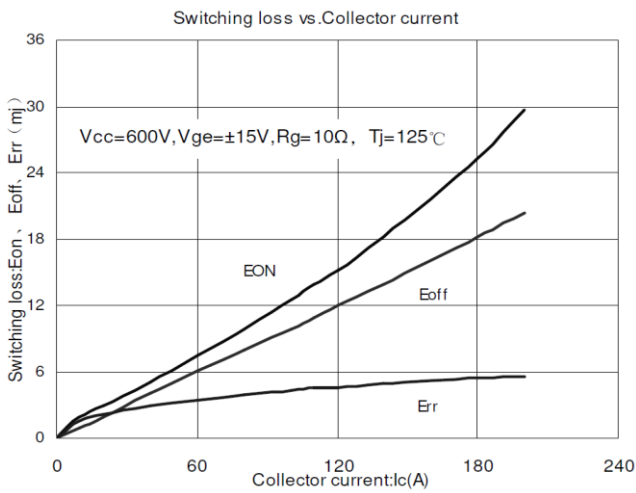


Fig.9

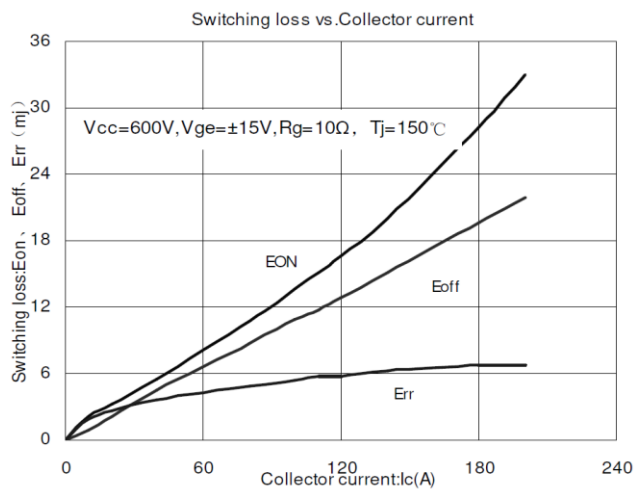


Fig.10

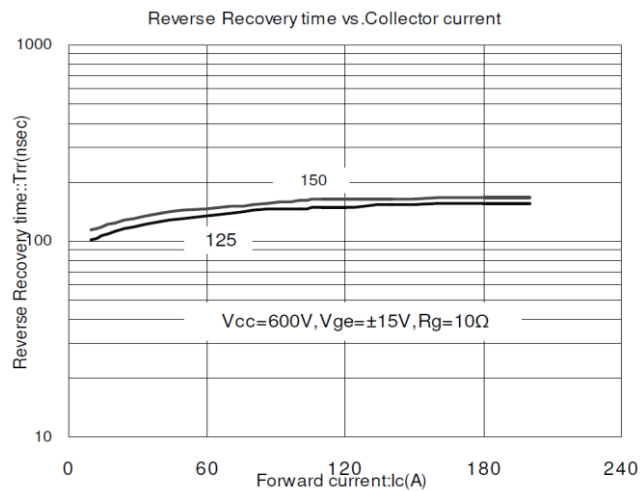


Fig.11


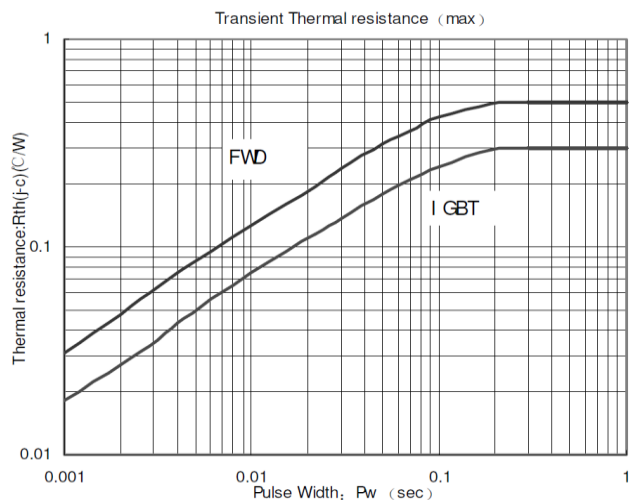


Fig.12

### Outline:

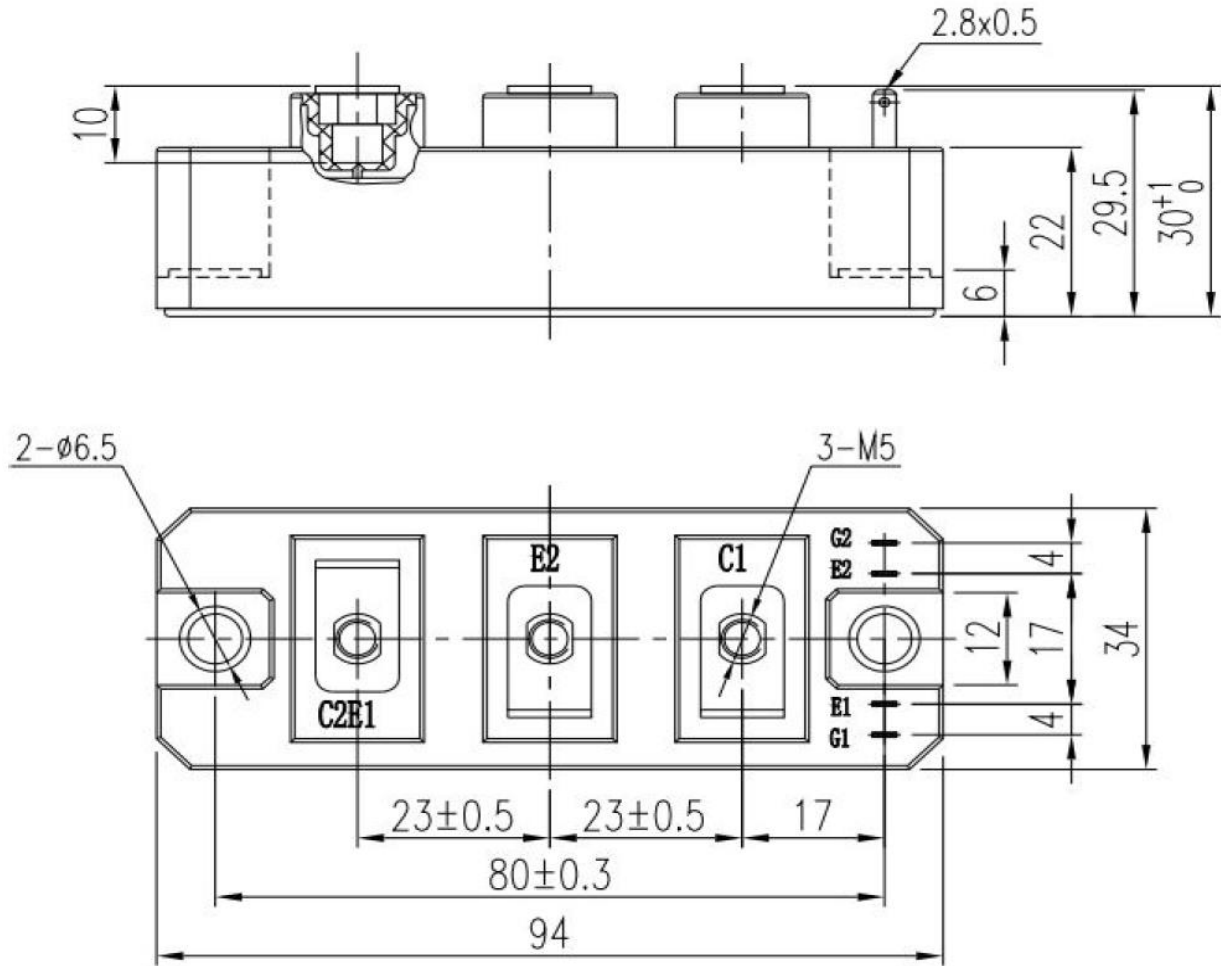

(dimensions in mm)

### S.CO.M.E.S. Srl

Via Enrico Mattei, 6/8 - 26283 - Castiglione d'Adda (LO) - Italy

Phone: +39 0377 901243 Fax: +39 0377 900206