

## MRS250.16

### Diodes module


#### Features:

- Isolated mounting base 2500V~
- Pressure contact technology with increased power cycling capability
- Space and weight savings
- UL recognized, file no. E312789




#### Typical applications:

- AC/DC motor drives
- Various rectifiers
- DC supply for PWM inverter

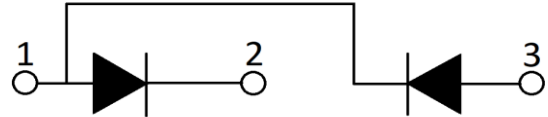


Symbol	Characteristics	Test Conditions	Value			Unit
			Min	Typ	Max	
$V_{RSM/DSM}$	Non-repetitive reverse/forward blocking voltage	$T_j = 150^\circ\text{C}$			1700	V
$V_{RRM/DRM}$	Repetitive reverse/forward blocking voltage	$T_j = 150^\circ\text{C}$			1600	V
$I_{F(AV)}$	Forward average current	180° half sine wave 50Hz $T_c = 102^\circ\text{C}$			250	A
$I_{F(RMS)}$	Forward square root current	180° half sine wave 50Hz $T_c = 102^\circ\text{C}$			390	A
$I_{RRM}$ $I_{DRM}$	Repetitive peak current	at $V_{DRM}/V_{RRM}$ $T_j = 150^\circ\text{C}$			20	mA
$I_{FSM}$	Forward surge current	10ms half sine wave $V_R = 60\% V_{RRM}$ $T_j = 25^\circ\text{C}$			9.50	kA
$I^2 t$	$I^2 t$ for fusing coordination				451	$\text{kA}^2\text{s}$
$V_{FO}$	Threshold voltage	$T_j = 150^\circ\text{C}$			0.75	V
$r_F$	Forward slope resistance	$T_j = 150^\circ\text{C}$			0.93	$\text{m}\Omega$
$V_{FM}$	Peak forward voltage	$T_j = 25^\circ\text{C}$ ; $I_F = 750\text{A}$			1.50	V
$R_{th(j-c)}$	Thermal resistance junction to case	Single side cooled per chip			0.130	$^\circ\text{C}/\text{W}$
$R_{th(c-s)}$	Thermal resistance case to sink	Single side cooled per chip			0.040	$^\circ\text{C}/\text{W}$
$V_{ISO}$	Isolation voltage	50Hz, RMS, $t = 1\text{min}$ , $I_{ISO} : 1\text{mA (MAX)}$	2500			V
$F_M$	Mounting torque - copper plate (M6)		4.5		6.0	N·m
	Mounting torque - terminal (M8)		8.0		10.5	N·m
$T_{stg}$	Storage Temperature		-40		125	$^\circ\text{C}$
$T_j$	Operating Temperature		-40		150	$^\circ\text{C}$
$W_t$	Weight			700		g
Outline		M95				

## MRS250.16

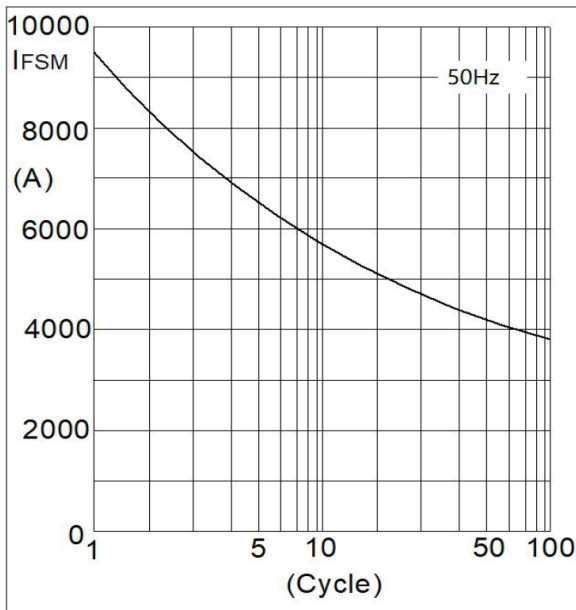

**Fig5. Max Non-Repetitive Forward Surge Current**

### Outline

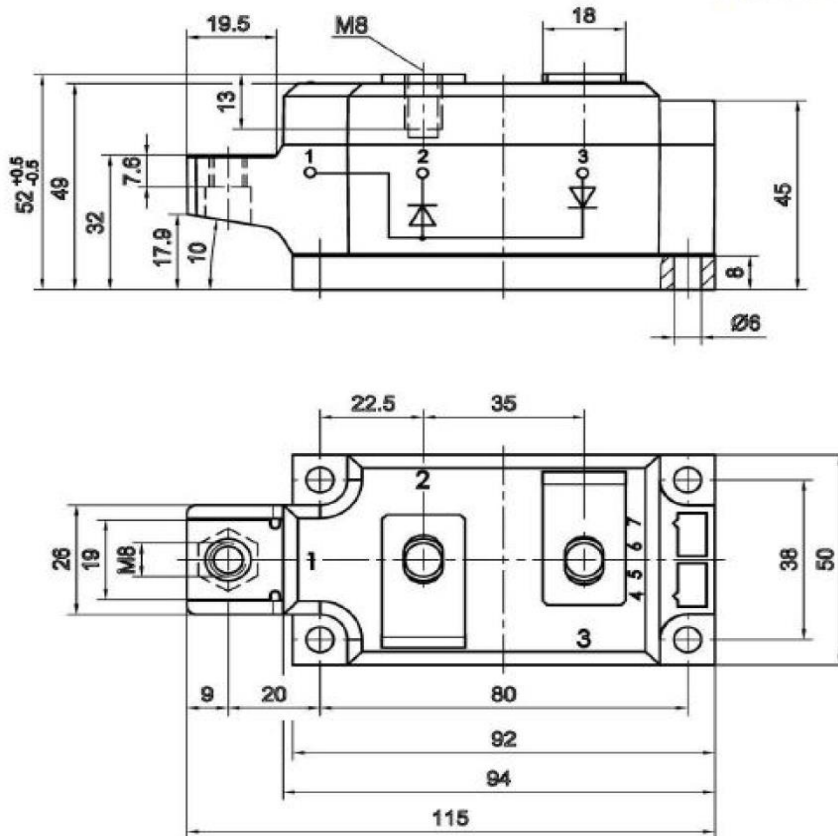


(dimensions in mm)


### S.CO.M.E.S. Srl

Via Enrico Mattei, 6/8 - 26283 - Castiglione d'Adda (LO) - Italy


Phone: +39 0377 901243 Fax: +39 0377 900206

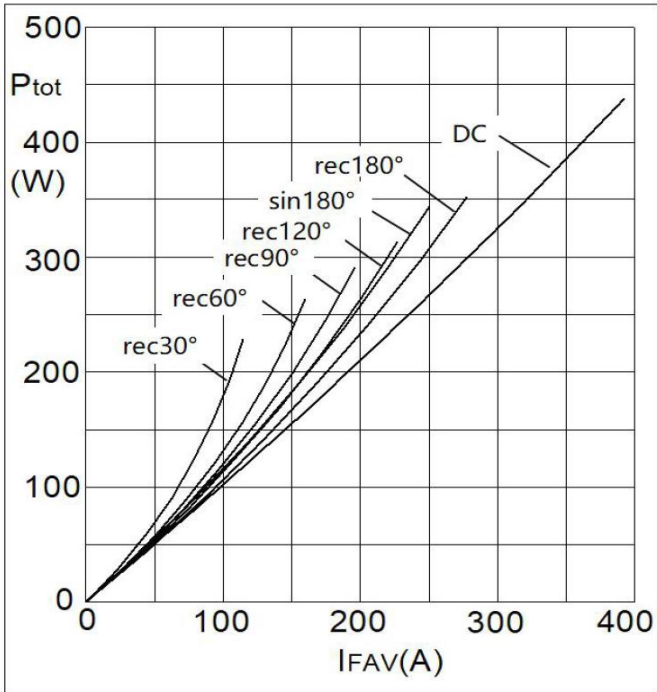


**Fig1. Power Dissipation**

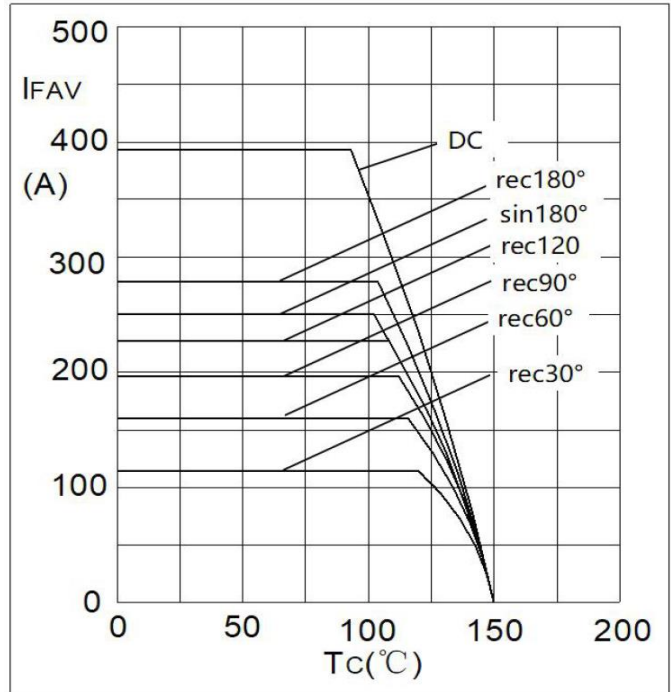

**Fig2. Forward Current Derating Curve**

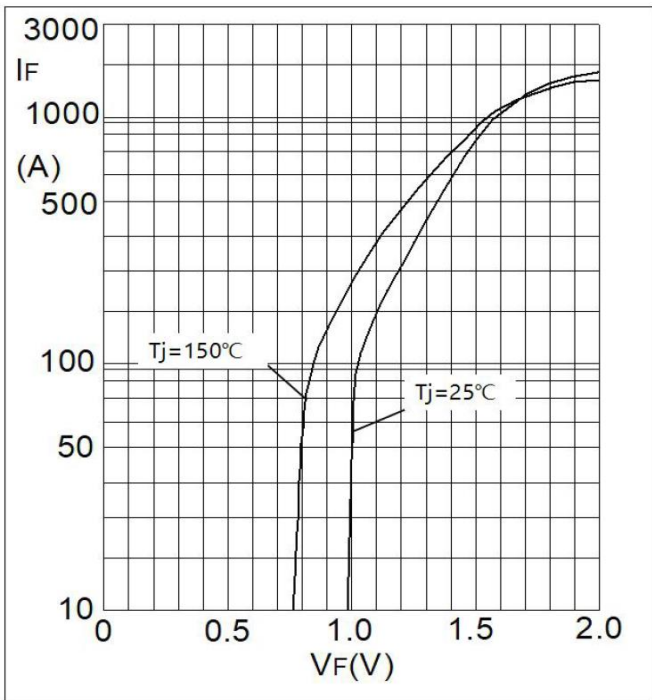

**Fig3. Forward Characteristics**

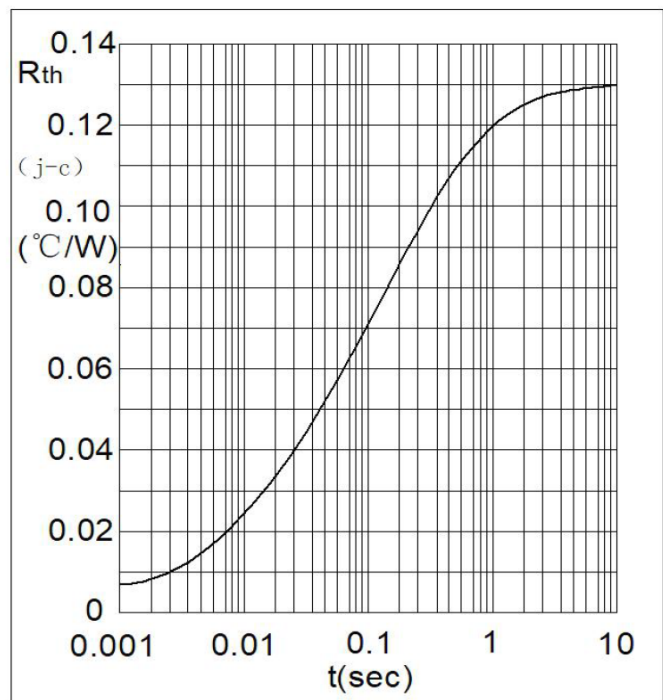

**Fig4. Transient Thermal impedance**