

## MRS300.16

### Diodes module




#### Features:

- International standard package
- Aluminum oxide DBC
- Isolation voltage 3000V ~
- Glass passivated chip
- UL recognized, file no. E312789

#### Typical applications:

- Various rectifier power
- AC/DC motor control
- Heater control
- Frequency converters

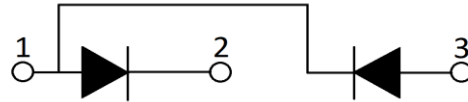

Symbol	Characteristics	Test Conditions	Value			Unit
			Min	Typ	Max	
$V_{RSM/DSM}$	Non-repetitive reverse/forward blocking voltage	$T_j = 25^\circ\text{C}$			1700	V
$V_{RRM/DRM}$	Repetitive reverse/forward blocking voltage	$T_j = 25^\circ\text{C}$			1600	V
$I_{F(AV)}$	Forward average current	180° half sine wave 50Hz $T_c = 105^\circ\text{C}$			300	A
$I_{F(RMS)}$	Forward square root current				470	A
$I_{RRM}$	Repetitive peak current	at $V_{DRM}/V_{RRM}$ , $T_j = 25^\circ\text{C}$			0.50	mA
		at $V_{DRM}/V_{RRM}$ , $T_j = 150^\circ\text{C}$			20	mA
$I_{FSM}$	Forward surge current	10ms half sine wave, $T_j = 25^\circ\text{C}$ , $V_R = 0$			10500	A
$I^2 t$	$I^2 t$ for fusing coordination	10ms half sine wave, $T_j = 25^\circ\text{C}$			551250	A <sup>2</sup> s
$V_{FO}$	Threshold voltage	$T_j = 125^\circ\text{C}$			0.90	V
$r_T$	Forward slope resistance	$T_j = 125^\circ\text{C}$			0.61	mΩ
$V_{FM}$	Peak forward voltage	$T_j = 25^\circ\text{C}$ ; $I_F = 900\text{A}$			1.50	V
$R_{th(j-c)}$	Thermal resistance junction to case	Single side cooled per chip			0.10	°C/W
$R_{th(c-s)}$	Thermal resistance case to sink	Single side cooled per chip			0.05	°C/W
$V_{ISO}$	Isolation voltage	50Hz, RMS, $t = 1\text{min}$		3000		V
$F_M$	Mounting torque - copper plate (M6)		4		6	N·m
	Mounting torque - terminal (M6)		4		6	N·m
$T_{stg}$	Storage Temperature		-40		125	°C
$T_j$	Operating Temperature		-40		150	°C
$W_t$	Weight			200		g
Outline	M117					

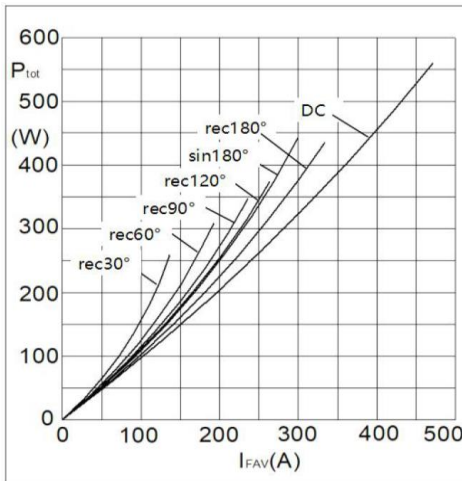


Fig1. Power Dissipation

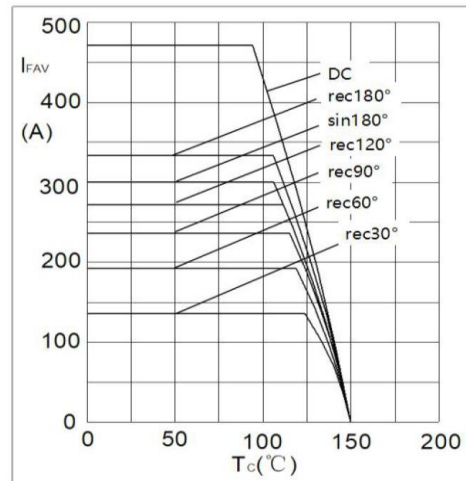


Fig2. Forward Current Derating Curve

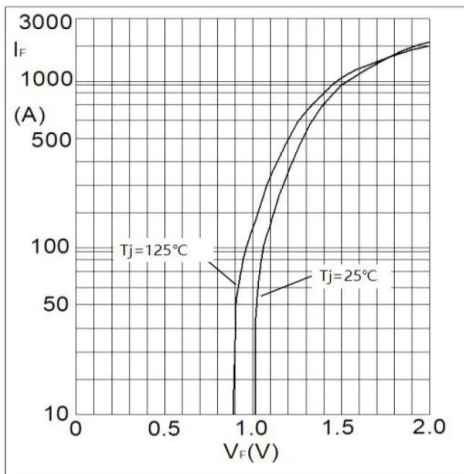


Fig3. Forward Characteristics

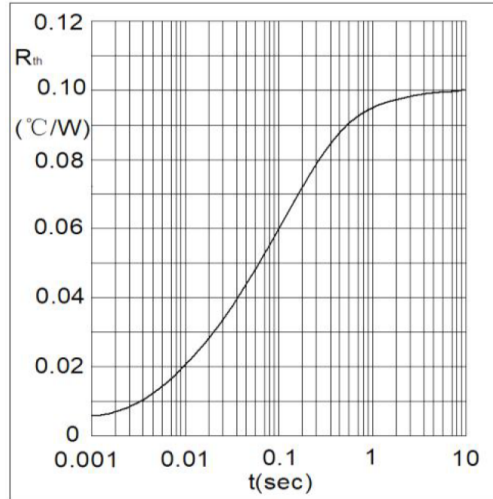


Fig4. Transient Thermal impedance


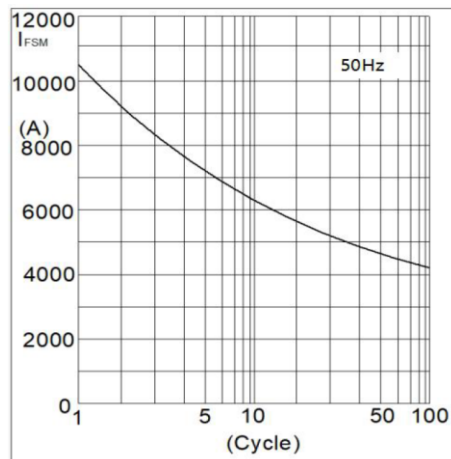


Fig5. Max Non-Repetitive Forward Surge Current

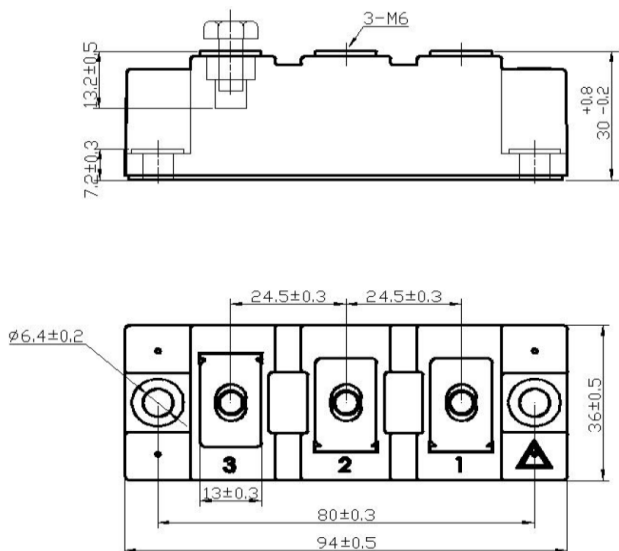

(dimensions in mm)

### S.CO.M.E.S. Srl

Via Enrico Mattei, 6/8 - 26283 - Castiglione d'Adda (LO) - Italy

Phone: +39 0377 901243 Fax: +39 0377 900206